

OPERATION

PROGRAMMING THE CAR REMOTES

See Figures 1 and 2.

WARNING:

Keep moving door in sight when using car remotes. Contact with moving door can cause DEATH or serious injury.

Once you begin programming the car remotes, you have two minutes to complete each step. If a step is not completed within two minutes, programming information will be erased.

- Press the **PROGRAM** button on the garage door opener's console.
- The main garage door opener's LEDs will turn off and the **PROGRAM** button will flash three times.
- Select button **1** or **2** on the car remote. Press the button once.
- The car remote's green LED will flash.
- The **PROGRAM** button on the main unit will flash three times.
- The garage door opener main unit LEDs will turn on.
- To verify that the program is set, press the car remote button you selected earlier.
- The garage door will open or close.
- Repeat this process to sync the garage door opener with an additional remote.

NOTE: Buttons **1** and **2** cannot both be programmed to the same garage door opener.

NOTE: Safety sensors must always be connected properly for the door to operate from the car remote.

NOTE: The garage door opener cannot be operated with a car remote until travel limits have been set.

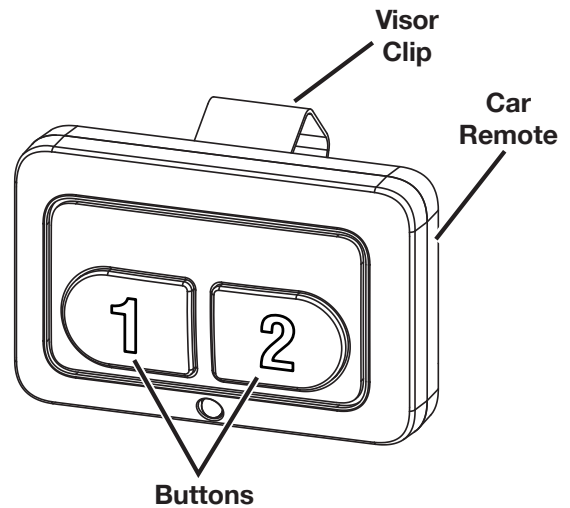


Fig. 1

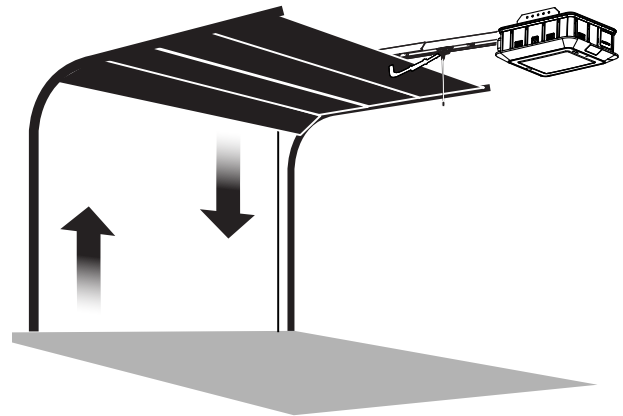


Fig. 2